

Anhui Tino Technology Co.,Ltd



PRODUCT CATALOGUE WATER FILTERS 2019

10 YEARS FOCUS ON WATER PURIFIER

COMPANY PROFILE

Anhui Tino Technology Co.,Ltd is attached to Hefei Gemei Electric Appliance Co.,Ltd. Which established since 2008, it's a professional comprehensive production & sales enterprise which mainly manufacture,research & develop various kinds of water filters and related products.

Till 2019, we have over 1600 employees, over 12000 square meters GMP standard dustless workshop, including Electronic SMT workshop, Mould injection workshop, Sheet metal processing workshop, Installation workshop, dozens of modern water filters production line,QC lines,and professional, systematic injection molding production lines. We can produce over 600,000sets household water filters,800,000pcs water tanks, 15,000pcs engineering water filters,60,000 sets water vending machines, 10,000 sets commercial water filters, 2,400,000pcs water filter cartridges. Our production capacity is China water filter lines leader, annual sales amount can reach USD140 million in last 2018.




Company cares much on the production,administration quality and products R&D,till now, we have past ISO9001, ISO14001,3C,SGS,BV,TUV,NSF,CE,ROHS etc enterprises & products certificates. Over 80% core spare parts manufactured by ourselves, we have successfully cooperated with Germany first-class designing company "LKK" to be our chief adviser. We have gained many patents,including the disposable filter cartridge,intelligent water vending machine etc 13 patents.

We support OEM/ODM service, warmly welcome global retailers and agents!



DEVELOPMENT HISTORY

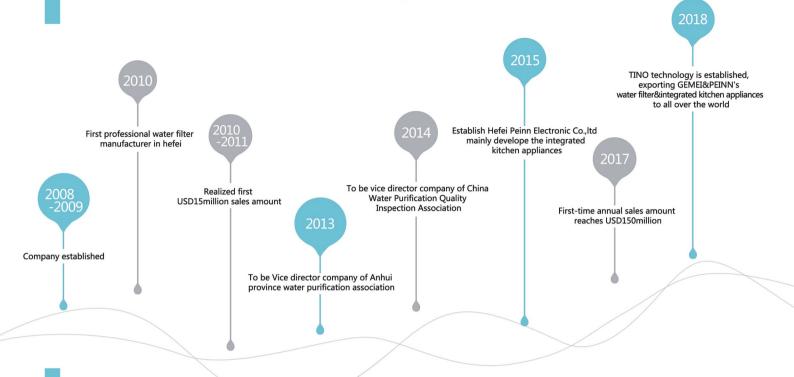

CERTIFICATION



ISO 9001:2015 certification

The quality of Gemei is manufacturing has been certified ISO 9001:2015, the world is leading inspection, verification, testing and certification company.



NSF certification(USA)

NSF International is a product testing and certification organization, the only of its kind chosen for collaboration by the World Health Organiazation(WHO), contributing to WHO 's Guidelines for Drinking-water Quality.













INDOOR WATER VENDING MACHIN

CREATE HEALTHY LIFE,10 YEARS FOCUS ON WATER PURIFIER





PRODUCT CHARACTERISTICS

GM-RO400G-S

For small community, urban village and other densely populated areas or water pollution areas for indoor only.

- Automatic water making and selling without manual work
- We support IC card payment, could accurate measurement of revenue
- The water-filled automatic Power Off system can effectively protect the safety of the circuit
- Insulation materials are laid inside to ensure normal operation in server winter
- Storefront is not required, covering only one square meter
- High quality reverse osmosis membrane to insure water purification;
- Stainless steel water tank with 80L
- Special mobile APP can check the working statue of the water vending machine at any time
- GSM function for optional

Product Size	Package Size	Rated power	Rated power
600*646*1500mm(Not including Universal wheel)	630*670*1700mm	220V-50Hz	228W (400G)
Filter Cartridge	Purified Water Flow	Purified Water Tank	NW/GW
5μmPP+CTO+1μmPP+RO+T33+UV+Ozone	400G/600G/800G	80L	103KG/114KG
Surrounding temperature	Purified water rate	Work pressure	Inlet pressure
4-40degree	0.19L/min (400G)	0.4-0.7MPa	0.1-0.4Mpa

OUTDOOR WATER VENDING MACHINE

CREATE HEALTHY LIFE, 10 YEARS FOCUS ON WATER PURIFIER





PRODUCT CHARACTERISTICS

GM-RO400G-W

For small community, urban village and other densely populated areas or water pollution areas.

- Automatic water making and selling without manual work
- We support IC card & Coin payment;
- The water-filled automatic Power Off system can effectively protect the safety of the circuit;
- Insulation materials are laid inside to ensure normal operation in server winter;
- Storefront is not required, covering only one square meter;
- Large capacity water storage can meet intensive drinking water demand;
- High quality reverse osmosis membrane to insure water purification;
- Water tank capacity of 100L;
- Special mobile APP can check the working statue of the water vending machine at any time
- GSM function for optional;

Product Size			Package Size	
750*670*1720mm(Not including Universal wheel)		790*720*1830mm		
Filter Cartridge			Purified Water Flow	Purified Water Tank
5μmPP+CTO+1μmPP+RO+T33+UV+Ozone 400G/600G/		/800G/1200G/Customized	100L	
NW/GW	Surrounding	temperature	Purified water rate	Work pressure
125KG/140KG	4-40deg	gree	0.19L/min (400G)	0.4-0.7MPa
Inlet pressure	Rated	oower	Rated power	QTY/ 20FCL/40FCL
0.1-0.4Mpa	220V-	50Hz	228W (400G)	21pcs /42pcs.

WATER VENDING MACHINE

CREATE HEALTHY LIFE.10 YEARS FOCUS ON WATER PURIFIER





PRODUCT CHARACTERISTICS

RO-400G (NEW DESIGN 2015)

For small community,urban villages, villages and other densely populated areas or water pollution areas.

- Automatic water making and selling without manual work
- We support both coin and card payment, could accurate measurement of revenue
- The water-filled automatic Power Off system can effectively protect the safety of the circuit
- Insulation materials are laid inside to ensure normal operation in severe winter
- Storefront is not required, covering only one square meter
- Large capacity water storage can meet intensive drinking water demand
- High quality reverse osmosis membrance to insure water pure.
- Scan code for payment
- Recharge by app
- Special mobile APP can check the working status of the water vending machine at any time

SPECIFICATION

Type	Rated Voltage	Rated Power	Inlet Water Pressure	Working Pressure	Purified Water Flow Rate	Rated Water Purified Capacity
RO-400G	220V/50Hz	228W	0.1-0.4MPa	0.4-0.7MPa	0.18m³/H	400G
RO-600G	220V/50Hz	330W	0.1-0.4MPa	0.4-0.7MPa	0.27m³/H	600G
RO-800G	220V/50Hz	345W	0.1-0.4MPa	0.4-0.7MPa	0.36m³/H	800G
	Product Size		Packag	ge Size	Net/Gross Weight	Set/Carton
840*875*192	0mm(Not includi		880*915*:	1920mm	155/165Kg	1
840*875*192	0mm(Not includi		880*915*:	1920mm	155/165Kg	1
840*875*192	0mm(Not includi		880*915*:	1920mm	155/165Kg	1
Qty/20'fcl/4	O'fcl Pro	essure Barrel		Pressure Barrel		
					1,000	

12/26 110L 5μmPP+GAC+CTO+1μmPP+RO membrane+T33
12/26 110L 5μmPP+GAC+CTO+1μmPP+RO membrane+T33
12/26 110L 5μmPP+GAC+CTO+1μmPP+RO membrane+T33

WATER VENDING MACHINE

CREATE HEALTHY LIFE, 10 YEARS FOCUS ON WATER PURIFIER





PRODUCT CHARACTERISTICS

RO-400G

For small community,urban villages, villages and other densely populated areas or water pollution areas.

- Automatic water making and selling without manual work
- We support both coin and card payment, could accurate measurement of revenue
- The water-filled automatic Power Off system can effectively protect the safety of the circuit
- Insulation materials are laid inside to ensure normal operation in severe winter
- Storefront is not required, covering only one square meter
- Large capacity water storage can meet intensive drinking water demand
- Excellent cutting, small weld and long service life
- High quality reverse osmosis membrance to insure water pure.
- Customized compressor cooler system, capable of making ice water, water making temperature: 4-9°C

Type	Rated Voltage	Rated Power	Inlet Water Pressure	Working Pressure	Purified Water Flow Rate	Rated Water Purified Capacity
RO-400G	220V/50Hz	228W	0.1-0.4MPa	0.4-0.7MPa	0.18m³/H	400G
RO-600G	220V/50Hz	330W	0.1-0.4MPa	0.4-0.7MPa	0.27m³/H	600G
RO-800G	220V/50Hz	345W	0.1-0.4MPa	0.4-0.7MPa	0.36m³/H	800G
	Product Size		Package Size			
840*853*19	915mm(Not includin		870*870*1950mm	GEN		
840*853*19	915mm(Not includin		870*870*1950mm	1 / 1 1 1/2		
840*853*19	915mm(Not includin		870*870*1950mm			
Set/Carton	Net/Gross Weight	Pressure Barrel	Qty/20'fcl/40'fcl	to the time to the		
1	155/165Kg	110L	12/26		A Para de la constante	
1	155/165Kg	110L	12/26	O O O O O		
1	155/165Kg	110L	12/26			
	Press	ure Barrel				
5µmPP+	+GAC+CTO+1µ	mPP+RO me	mbrane+T33			
5µmPP+	+GAC+CTO+1µ	mPP+RO me	mbrane+T33			
5µmPP+	+GAC+CTO+1 μ	mPP+RO me	mbrane+T33			

RO DIRECT DRINKING MACHINE

CREATE HEALTHY LIFE, 10 YEARS FOCUS ON WATER PURIFIER



PRODUCT CHARACTERISTICS

RO75G-LY16A1

- Double water faucet
- 10L original water tank and 5L pure water tank
- Wastewater recovery (17L bucket)
- Ice water tank 1.5 L
- hot water tank 3.5 L
- No installation and tap water interface

SPECIFICATION

Rated Voltage	220V/50Hz
Rated Power	837W
Inlet Water Pressure	0.1-0.4Mpa
Working Pressure	0.4-0.6MPa
Filtration Mode	4Stages
Filter Cartridges	5µmPP+CTO+75G RO+T33(10inch)
Product Size	430*380*1300mm
Package Size	513*443*1345mm
Net/Gross Weight	35Kg/40Kg
Working Patternl	5L/h(≥90°C)
Tank Capacity	10L original water tank 5.0L pure water tank 3.5L Hot water storage tank 17L waste water tank
Purified Water Flow Rate	0.16L/min

PRODUCT CHARACTERISTICS

TN-RO-LRY-11

- High efficiency heating/child lock protection
- Anti-dry prevention
- Filter cartridge situation reminder function
- One-button hot and cold water supply
- Fashionable appearance design
- 4 stages RO filter cartridge
- Automatically standby after two hours without operation
- Compressor cooling system for optional

MODEL	TN-RO-LRY-11A	TN-RO-LRY-11B
Water purification method	Reverse osmosis	Ultrafiltration
Water purification ability	RO 7.8-31.2L/h	UF 50L/h
Water tank capacity	12L	
Hot Water tank capacity	3.5-6L	
Cold Water tank capacity	5L	
Cold Water temp	4~10°C	
Hot Water temp	85~95°C	
Cooler	Compressor	
Size of model	380x460x1247mm	
Packing size	420x475x1260mm	
Net weight	RO 33kg	UF 30kg
Gross weight	RO 36kg	UF 33kg
Container loading qty.	40′ HQ/220台	



CENTRAL WATER SOFTENER

CREATE HEALTHY LIFE, 10 YEARS FOCUS ON WATER PURIFIER



PRODUCT CHARACTERISTICS

CS15-K1

Through the exchange of functional ions on the resin with calcium and magnesium ions, the superfluous calcium and magnesium ions in the water can be adsorbed to remove the incrustation(calcium carbonate or magnesium carbonate)

- Countercurrent regeneration technology is adopted to minimize the cost, effectively reduce the amount of reclaimed water and salt;
- Intelligent control system, time & flow double controled,regular automatic regeneration, convenient and relieved;
- Special cationic resin, long cycle of water production, long service life;
- Delicate shape, compact structure design, save installation space.

SPECIFICATION

Rated Voltage	220V/50Hz
Inlet Water Pressure	0.2-0.5MPa
Purified Water Flow Rate	1.5m³/h
Rated Water Purified Capacity	800m³
Regeneration Period	2m³
Product Size	380*220*530mm
Package Size	510*340*650mm
Net/Gross Weight	14.5kg/18kg
Resin volume	9L
Set/Carton	
Configuration	Positive Ion Exchange Resin Regenerated Soft Brine PE salt box Electronic Control Valve
Qty/20'fcl/40'fcl	252/504

PRODUCT CHARACTERISTICS

CS20

Through the exchange of functional ions on the resin with calcium and magnesium ions, the superfluous calcium and magnesium ions in the water can be adsorbed to remove the incrustation(calcium carbonate or magnesium carbonate)

- Countercurrent regeneration technology is adopted to minimize the cost, effectively reduce the amount of reclaimed water and salt;
- Intelligent control system, time & flow double controled,regular automatic regeneration, convenient and relieved;
- Special cationic resin, long cycle of water production, long service life;
- Delicate shape, compact structure design, save installation space.

51 2011 107 (1101)	
Rated Voltage	220V/50Hz
Inlet Water Pressure	0.2-0.5MPa
Purified Water Flow Rate	2m³/h
Rated Water Purified Capacity	1000m³
Regeneration Period	3.6m³
Product Size	440*360*1100mm
Package Size	490*330*1170mm
Net/Gross Weight	32Kg/35Kg
Resin volume	15L
Set/Carton	
Configuration	Positive Ion Exchange Resin Regenerated Soft Brine PE salt box Electronic Control Valve
Qty/20'fcl/40'fcl	168/336



UF WATER FILTER

CREATE HEALTHY LIFE, 10 YEARS FOCUS ON WATER PURIFIER















GM-UF-105A PRODUCT CHARACTERISTICS

- 5 stages or customized multistage UF technology
- High quality ultra filtration membrane
- Low demand for water pressure
- Low failure rate and leakage rate
- No pressure bucket to prevent secondary pollution
- No waste water, no waste electricity











SPECIFICATION

Rated Voltage	0V	Product Size	410*91*330mm
Rated Power	0W	Package Size	445*135*415mm
Inlet Water Pressure	/	Net/Gross Weight	3.3/4.2Kg
Working Pressure	0.2-0.4Mpa	Pressure Barrel	/
Purified Water Flow Rate	0.7L/min	Connector Type	1/2",1/3",1/4"
Rated Water Purified Capacity	1000L	Rated Water Purified Capacity	1000L
Filtration Mode	5-Stages	Set/Carton	5
Filter Cartridges	5μmPP+CTO+1μmPP+UF+CTO	Qty/20fcl/40fcl	1190/2380



GM-UF-105B PRODUCT CHARACTERISTICS

- 5 stages or customized multistage UF technology
- High quality ultra filtration membrane
- Low demand for water pressure
- Low failure rate and leakage rate
- No pressure bucket to prevent secondary pollution
- No waste water, no waste electricity











Rated Voltage	0V	Product Size	400*365*98mm
Rated Power	0W	Package Size	470*153*440mm
Inlet Water Pressure	/	Net/Gross Weight	3.3/4.2Kg
Working Pressure	0.2-0.4Mpa	Pressure Barrel	/
Purified Water Flow Rate	0.7L/min	Connector Type	1/2",1/3",1/4"
Rated Water Purified Capacity	1000L	Rated Water Purified Capacity	1000L
Filtration Mode	5-Stages	Set/Carton	5
Filter Cartridges	5μmPP+CTO+1μmPP+UF+CTO	Qty/20fcl/40fcl	975/2025

RO WATER FILTER

CREATE HEALTHY LIFE, 10 YEARS FOCUS ON WATER PURIFIER



















PRODUCT CHARACTERISTICS

TN-RO75G-2D

- Adopt five-stage or other customized multi-stage reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter cartridge for easy replacement
- Large flow of clean water
- 50G/75G/100G











SPECIFICATION

Rated Voltage	220V/50Hz
Rated Power	48W
Inlet Water Pressure	0Мра
Working Pressure	0.4-0.6Mpa
Filtration Mode	5-Stages
Filter Cartridges	5μmPP+CTO+1μmPP+RO+T33(10inch)

Product Size	387*210*460mm
Package Size	420*370*560mm
Net/Gross Weight	9.5kg/16kg
Pressure Barrel	3.2G
Connector Type	1/2",1/3",1/4"
Purified Water Flow Rate	0.16L/min



PRODUCT CHARACTERISTICS

TN-RO75G-2B

- Adopt five-stage or other customized multi-stage reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter cartridge for easy replacement
- Large flow of clean water
- 50G/75G/100G











Rated Voltage	220V/50Hz
Rated Power	35W
Inlet Water Pressure	0.1-0.4Mpa
Working Pressure	0.4-0.6Mpa
Filtration Mode	5-Stages
Filter Cartridges	5μmPP+CTO+1μmPP+RO+T33(10inch)

Product Size	387*210*460mm
Package Size	420*370*560mm
Net/Gross Weight	9.5Kg/16Kg
Pressure Barrel	3.2 G
Connector Type	1/2",1/3",1/4"
Purified Water Flow Rate	0.16L/min





TN-R075G-12A

- Adopt five-stage or other customized multi-stage reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter cartridge for easy replacement
- Large flow of clean water
- 50G/75G/100G











SPECIFICATION

Rated Voltage	220V/50Hz
	·
Rated Power	35W
Inlet Water Pressure	0.1-0.4Mpa
Working Pressure	0.4-0.6Mpa
Filtration Mode	5-Stages
Filter Cartridges	5μmPP+CTO+1μmPP+RO+T33(10inch)

Product Size	445*243*505mm
Package Size	465*390*535mm
Net/Gross Weight	8.8Kg/13.2Kg
Pressure Barrel	3.2G
Connector Type	1/2",1/3",1/4"
Purified Water Flow Rate	0.16L/min



PRODUCT CHARACTERISTICS

TN-R075G-106A

- Adopt four-stage or other customized multi-stage reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter cartridge for easy replacement
- Large flow of clean water
- 50G/75G/100G









Rated Voltage	220V/50Hz	Product Size
Rated Power	35W	Package Size
Inlet Water Pressure	0.1-0.4Mpa	Net/Gross Weight
Working Pressure	0.4-0.6Mpa	Pressure Barrel
Filtration Mode	4-Stages	Connector Type
Filter Cartridges	5umPP+CTO+75G RO+T33(10inch)	Purified Water Flow Rate

Product Size	537*386*153mm
Package Size	600*460*470mm
Net/Gross Weight	7.5Kg/13.3Kg
Pressure Barrel	3.2G
Connector Type	1/2",1/3",1/4"
Purified Water Flow Rate	0.16L/min



PRODUCT CHARACTERISTICS

TN-R075G-107A

- Adopt five-stage or other customized multi-stage reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter cartridge for easy replacement
- Large flow of clean water
- 50G/75G/100G









SPECIFICATION

Rated Voltage	220V/50Hz
Rated Power	35W
Inlet Water Pressure	0.1-0.4Mpa
Working Pressure	0.4-0.6Mpa
Filtration Mode	5-Stages
Filter Cartridges 5µmPP+CTO+1µmPP+75G R	O+T33(10inch)

Product Size	472*403*208mm
Package Size	525*460*515mm
Net/Gross Weight	11.6Kg/16.6Kg
Pressure Barrel	3.2G
Connector Type	1/2",1/3",1/4"
Purified Water Flow Rate	0.16L/min



TN-R075G-200

- Adopt four-stage or other customized multi-stage reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter cartridge for easy replacement
- Large flow of clean water
- 50G/75G/100G









SPECIFICATION

SPECIFICATION

Rated Voltage	220V/50Hz
Rated Power	35W
Inlet Water Pressure	0.1-0.4Mpa
Working Pressure	0.4-0.7Mpa
Filtration Mode	4-Stages
Filter Cartridges	5µmPP+CTO+75G RO+T33(10inch)

Product Size	435*166*474mm
Package Size	912*287*546mm
Net/Gross Weight	8Kg/13Kg
Pressure Barrel	3.2 G
Connector Type	1/2",1/3",1/4"
Purified Water Flow Rate	0.16L/min



PRODUCT CHARACTERISTICS

TN-RO400G-200

- Adopt four-stage or other customized multi-stage reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter cartridge for easy replacement
- Large flow of clean water








Rated Voltage	220V/50Hz
Rated Power	65W
Inlet Water Pressure	0.1-0.4Mpa
Working Pressure	0.4-0.7Mpa
Filtration Mode	4-Stages
Filtor Cartridges	Fum DD + CTO + 400C DO + T22/ 10inch)

Product Size	435*166*474mm
Package Size	632*287*546mm
Net/Gross Weight	8Kg/13Kg
Pressure Barrel	/
Connector Type	1/2",1/3",1/4"
Purified Water Flow Rate	0.9L/min

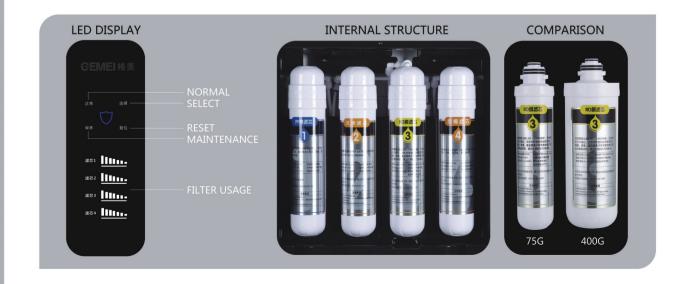



TN-R075G-201

- Adopt four-stage or other customized multi-stage reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter cartridge for easy replacement
- Large flow of clean water
- 50G/75G/100G









SPECIFICATION

SPECIFICATION

Rated Voltage	220V/50Hz
Rated Power	35W
Inlet Water Pressure	0.1-0.4Mpa
Working Pressure	0.4-0.7Mpa
Filtration Mode	4-Stages
Filter Cartridges	5umPP+CTO+75G RO+T33(10inch)

z	Product Size	437*164*474mm
V	Package Size	896*256*533mm
a	Net/Gross Weight	8Kg/13Kg
а	Pressure Barrel	3.2G
S	Connector Type	1/2",1/3",1/4"
)	Purified Water Flow Rate	0.16L/min



PRODUCT CHARACTERISTICS

TN-RO400G-201

- Adopt four-stage or other customized multi-stage reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter cartridge for easy replacement
- Large flow of clean water








Rated Voltage	220V/50Hz
Rated Power	65W
Inlet Water Pressure	0.1-0.4Mpa
Working Pressure	0.4-0.7Mpa
Filtration Mode	4-Stages
Filter Cartridges	5µmPP+CTO+400G RO+T33(10inch)

Purified Water Flow Rate	0.9L/min
Connector Type	1/2",1/3",1/4"
Pressure Barrel	/
Net/Gross Weight	8Kg/13Kg
Package Size	632*287*546mm
Product Size	435*166*474mm

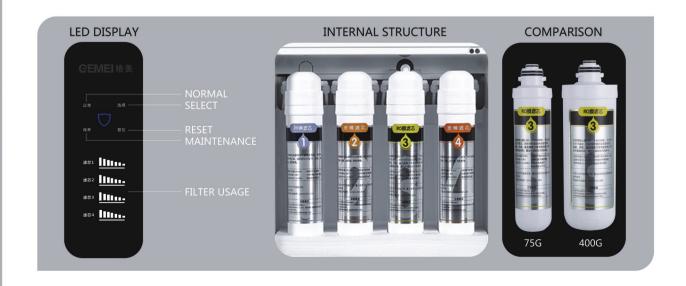



TN-R075G-Z108

- Adopt five-stage or other customized multi-stage reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter cartridge for easy replacement
- Large flow of clean water
- 50G/75G/100G
- Booster pump









SPECIFICATION

Rated Voltage	220V/50Hz
Rated Power	35W
Inlet Water Pressure	0.1-0.4Mpa
Working Pressure	0.4-0.6Mpa
Filtration Mode	5-Stages
Filter Cartridges FumDB + CTO + 1 um DB	75G PO (T22/ 10inch)

Product Size	475*155*388mm
Package Size	775*276*450mm
Net/Gross Weight	7.5Kg/13.3Kg
Pressure Barrel	3.2G
Connector Type	1/2",1/3",1/4"
Purified Water Flow Rate	0.16L/min



PRODUCT CHARACTERISTICS

TN-R075G-X108

- Adopt five-stage or other customized multi-stage reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter cartridge for easy replacement
- Large flow of clean water
- 50G/75G/100G
- Self-priming pump









SPECIFICATION

Rated Voltage	220V/50Hz
Rated Power	48W
Inlet Water Pressure	ОМра
Working Pressure	0.4-0.6Mpa
Filtration Mode	5-Stages
Filter Cartridges 5µmPP+CTO+1µmF	PP+75G RO+T33(10inch)

Product Size	475*155*388mm
Package Size	775*276*450mm
Net/Gross Weight	7.5Kg/13.3Kg
Pressure Barrel	3.2G
Connector Type	1/2",1/3",1/4"
Purified Water Flow Rate	0.16L/min



PRODUCT CHARACTERISTICS

TN-RO75G-168-1

- Adopt five-stage or other customized multi-stage reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter cartridge for easy replacement
- Large flow of clean water
- 50G/75G/100G
- Booster pump









Rated Voltage	220V/50Hz	Product Size
Rated Power	35W	Package Size
Inlet Water Pressure	0.1-0.4Mpa	Net/Gross We
Working Pressure	0.4-0.6Mpa	Pressure Barr
Filtration Mode	5-Stages	Connector Ty
Filter Cartridges 5µmPP+CTO+1µmPP+75G F	RO+T33(10inch)	Purified Wate

Product Size	475*155*388mm
Package Size	775*276*450mm
Net/Gross Weight	7.5Kg/13.3Kg
Pressure Barrel	3.2G
Connector Type	1/2",1/3",1/4"
Purified Water Flow Rate	0.16L/min



TN-RO75G-168-2

- Adopt five-grade or other customized multi-grade reverse osmosis technology
- High quality water purifier technology, you can specify the brand of RO membrane
- Intelligent LED display, you can grasp the status at any time
- Fresh direct drinking
- Removable filter element for easy replacement
- Large flow of clean water
- 50G/75G/100G
- Self-priming pump









SPECIFICATION

Rated Voltage	220V/50Hz
Rated Power	48W
Inlet Water Pressure	0Мра
Working Pressure	0.4-0.6Mpa
Filtration Mode	5-Stages
Filter Cartridges 5µmPP+CTO+1µmPP+	75G RO+T33(10inch)

Product Size	475*155*388mm
Package Size	775*276*450mm
Net/Gross Weight	7.5Kg/13.3Kg
Pressure Barrel	3.2G
Connector Type	1/2",1/3",1/4"
Purified Water Flow Rate	0.16L/min



PRODUCT CHARACTERISTICS

TN-R075G-T101


- Four stage temperature, Instrument panel display
- Tombarthite thick film instantaneous thermo module
- High quality RO reverse osmosis membrane, RO membrane Brands could be specified.
- Adopt Multi stage reverse osmosis technology
- 5L Built-in bucket, Large water output capacity
- Water quality testing & filter life reminder

SPECIFICATION

Rated Voltage	220V/50Hz	Product Size	370*243*394mm
Rated Power	2200W	Package Size	485*312*464mm
Inlet Water Pressure	/	Net/Gross Weight	11Kg/13Kg
Working Pressure	0.4-0.6Mpa	Tank Capacity	5L
Filtration Mode	4-Stages	Working Pattern	Self-priming
Filter Cartridges	5µmPP+CTO+75G RO+T33(10inch)	Purified Water Flow Rate	0.16L/min



TN-R075G-122



- Adopt Multi-stage reverse osmosis technology
- ABS Shell ,Glass Pannel
- Cold and hot water filter
- Food grade 7L built-In water tank, large water output capacity
- 304 grade 1L stainless steel thermal tank









Rated Voltage	220V/50Hz	Product Size	550*220*420mm
Rated Power		Package Size	635*330*480mm
Inlet Water Pressure	0.1-0.4Mpa/0Mpa	Net/Gross Weight	7.5Kg/13.3Kg
Working Pressure	0.4-0.6Mpa	Tank Capacity	7L pure water tank
Filtration Mode	5-Stages		1L Hot water storage tank
Filter Cartridges 5µr	mPP+CTO+1µmPP+75G RO+T33(10inch)	Purified Water Flow Rate	0.16L/min

INDUSTRID WATER FILTER

CREATE HEALTHY LIFE, 10 YEARS FOCUS ON WATER PURIFIER



PRODUCT CHARACTERISTICS

TN-RO-SW-1

- Reverse osmosis (RO) membrane technology to effectively filter all kinds of pollutants
- Five-stage filtration, deep purification of water quality, water quality is stable and reliable
- Fully automatic operation and stop
- Low voltage automatic stop protection, automatic washing at startup
- High water yield, suitable for commercial use

SPECIFICATION

Rated Voltage	220V/50Hz
Rated Power	85W
Inlet Water Pressure	0.1-0.4MPa
Working Pressure	0.4-0.7MPa
Purified Water Flow Rate	0.53L/min
Rated Water Purified Capacity	200G
Product Size(Not including Universal wheel)	600*600*903mm
Package Size	615*615*910mm
Tank	11G
Filter Cartridges	
5µmPP+CTO+1µmPP+R0	O membrance+T33
Net/Gross Weight	63/66Kg
Set/Carton	1
Qty/20'fcl/40'fcl	54/108

PRODUCT CHARACTERISTICS

TN-RO-SW-2

- Reverse osmosis (RO) membrane technology to effectively filter all kinds of pollutants
- Five-stage filtration, deep purification of water quality, water quality is stable and reliable
- Fully automatic operation and stop
- Low voltage automatic stop protection, automatic washing at startup
- High water yield, suitable for commercial use
- The water filter can connect multiple faucets
- 400G/800G

Rated Voltage	220V/50Hz
Rated Power	85W
Inlet Water Pressure	0.1-0.4MPa
Working Pressure	0.4-0.7MPa
Purified Water Flow Rate	0.18m ³ /H
Rated Water Purified Capacity	400G
Product Size(Not including Universal wheel)	600*600*1503mm
Net/Gross Weight	615*615*1550mm
Tank	11G
Filter Cartridges	
5μmPP+GAC+CTO+1μmP	P+RO membrane+T33
Net/Gross Weight	93/97Kg
Set/Carton	1
Qty/20'fcl/40'fcl	54/108
Net/Gross Weight Tank Filter Cartridges 5µmPP+GAC+CTO+1µmP Net/Gross Weight Set/Carton	615*615*1550m 11 P+RO membrane+T. 93/970



COMMERCIAL WATER FILTER

CREATE HEALTHY LIFE, 10 YEARS FOCUS ON WATER PURIFIER



PRODUCT CHARACTERISTICS

YSJ-4WB35

- Whole machine made of 304 stainless steel wire drawing material Optional touch buttons
- 3 stages purification (5 umPP + GAC +1 umPP)
- Microcomputer controlled
- Large capacity of water supply

SPECIFICATION

Rated Voltage	380V AC/50Hz
Rated current	6.8A
Rated Power	4.5KW
Inlet Water Pressure	0.1 ~ 0.4MPa
Rated Water Purified Capacity	400G
Product Size	1050*380*1350mm
Package Size	1090*420*1360mm
Water bladder capacity	35L
Hot water production	40L
Normal water	120L/H
	No filtration
Filter Cartridges	3 grade filtration
	5 grade filtration

PRODUCT CHARACTERISTICS

YSJ-2WC60

- Microcomputer controlled stepper heating technology, layer by layer input water, layer by layer heating
- Whole polyurethane foam warm insulation
- Large flux of continuous water supply
- Steam heat recovery technology
- Complete separation of cold and hot water, computer temperature control

Rated Voltage	380V AC/50Hz
Rated current	6.8A
Rated Power	4.5KW
Inlet Water Pressure	0.1 ~ 0.4MPa
Rated Water Purified Capacity	2000L
Product Size	600*470*1700mm
Package Size	630*500*1730mm
Control mode	computer controlled stepper
Water bladder capacity	60L
Hot water production	50L
Normal water	60L/H
Applicable people number	60-100people
	No filtration
Filter Cartridges	3 grade filtration
	5 grade filtration





YSJ-3WC

- Water dispenser with LED display, time and timing function by using computer board control with stable performance
- 304 stainless steel tank, extending the service life of tank by fully automatic argon arc welding
- The pipeline is connected with stainless hard pipe, firm and durable with best sealability
- 2000L/3000L

SPECIFICATION

Rated Voltage	380V AC/50Hz
Rated current	6.8A
Rated Power	4.5KW
Inlet Water Pressure	0.1 ~ 0.4MPa
Rated Water Purified Capacity	2000L/3000L
Product Size	1050*490*1730mm
Package Size	1090*530*1740mm
Control mode	computer controlled stepper
Water bladder capacity	60L
Hot water production	50L
Normal water	100L/H
Applicable people number	60-80people
	No filtration
Filter Cartridges	3 grade filtration
	5 grade filtration

PRODUCT CHARACTERISTICS

YSJ-2WF18

- This product is specially designed for kindergarten
- The temperature of boiling water is suitable for children without scald
- Full arc without sharp Angle design to prevent collision
- Intelligent voice system, remind drinking water, develop good drinking habits
- Pioneering the front touch screen switch, which is more convenient for children to use to prevent accidental touch.
- Purified warm water , boiled and do not scald children

Rated Voltage	220V AC/50Hz
Rated current	9.1A
Rated Power	2KW
Inlet Water Pressure	0.1 ~ 0.4MPa
Rated Water Purified Capacity	2000L
Product Size	600*380*1040mm
Package Size	630*410*1070mm
Control mode	computer controlled stepper
Water bladder capacity	18L
Hot water production	20L
Normal water	80L/H
Applicable people number	40-80people
	No filtration
Filter Cartridges	3 grade filtration
	5 grade filtration





ANHUI TINO TECHNOLOGY CO.,LTD

Tel.:+86 551 62622207

Mobile: +86 18655115905, 13155178519

Website: www.tinowaterfilter.com

Facebook: www.facebook.com/TNwaterfilter/

Youtube: https://www.youtube.com/channel/UCBIKTHehigCV1xCZHjZ13Og/

Add.: 2201~07, A block, Huabang ICC, No.190 QianShan road,

Zhengwu district, Hefei, Anhui, China. 230001.